



ASSOCIATED ENVIRONMENTAL SYSTEMS

Helping our customers make their products the best that they can be.
Stronger • Faster • Safer
Longer-Lasting

FD-SERIES

We get you there faster.



DESCRIPTION

The FD Series is a floor-model chamber with three temperature range options. The Series features 11 working-volume configurations ranging from 1 cubic foot to 64 cubic feet. The exclusive, AES-designed inner-baffle, provides increased temperature stability and even air circulation.

STANDARD FEATURES

- Interior: All stainless steel type 304
- Exterior: Heavy gauge cold rolled steel with powder coat finish
- Multi-pane viewing window in door
- Internal light with external switch
- 3" access port and plug opposite door hinge
- Casters for mobility
- Watlow F4T programmable controller with AES|XCHANGE
- Adjustable digital high temperature safety



AssociatedEnvironmentalSystems.com
Sales@AssociatedEnvironmentalSystems.com

Massachusetts, California, Michigan
Phone: (978) 772-0022
Fax: (978) 772-0088

FD-SERIES

10 ft³ & Less



SPECIFICATIONS

OPTIONS

- Custom Port Sizes
- Adjustable Shelving
- LN₂/CO₂ Boost Cooling
- Air Dryer for Lower Humidity Range
- Adjustable High/Low Temperature Safety
- Noise Reduction Package
- Retro Legacy F4 Controller
- Programmable Chart Recorder



For the latest in remote operation and data management, AES|XCHANGE enables you to operate and program the controller at the chamber, your desktop, and remotely via laptop or tablet. A visual graph allows you to view live & historical test data. A drag-&-drop profile builder allows you to create, edit, save, and move between profiles. Onboard multi-year data logging collect and manage live & Historical data while chamber is operating. JSON API makes for easy communication. And access control allows for secure multi-user interaction.

For details and product specifications go to <https://www.associatedenvironmentalsystems.com/xchange>

FD-200's Temperature -65°C to 180°C (-85°F to 356°F)

Model	Overall Dimensions (in)	Inside Dimensions (in)	Working Volume
FD-201	19.5W x 32D x 41H	13.5W x 16D x 9H	1.125 cu. ft.
FD-202	31.5W x 36.5D x 63.5H	17W x 13D x 16H	2.046 cu. ft.
FD-205	31.5W x 36.3D x 66.7H	22W x 20D x 20H	5.092 cu. ft.
FD-208	33.5W x 40.5D x 67.5H	24W x 24D x 24H	8 cu. ft.
FD-210	37.5W x 44D x 71.5H	24W x 27D x 28H	10.5 cu. ft.

FD-500's Temperature -37°C to 180°C (-34.6°F to 356°F)

Model	Overall Dimensions (in)	Inside Dimensions (in)	Working Volume
FD-501	19.5W x 32D x 41H	13.5W x 16D x 9H	1.125 cu. ft.
FD-502	31.5W x 36.5D x 63.5H	17W x 13D x 16H	2.046 cu. ft.
FD-505	31.5W x 36.3D x 66.7H	22W x 20D x 20H	5.092 cu. ft.
FD-508	33.5W x 40.5D x 67.5H	24W x 24D x 24H	8 cu. ft.
FD-510	37.5W x 44D x 71.5H	24W x 27D x 28H	10.5 cu. ft.

FD-400's Temperature -17°C to 180°C (1.4°F to 356°F)

Model	Overall Dimensions (in)	Inside Dimensions (in)	Working Volume
FD-401	19.5W x 32D x 41H	13.5W x 16D x 9H	1.125 cu. ft.
FD-402	31.5W x 36.5D x 63.5H	17W x 13D x 16H	2.046 cu. ft.
FD-405	31.5W x 36.3D x 66.7H	22W x 20D x 20H	5.092 cu. ft.
FD-408	33.5W x 40.5D x 67.5H	24W x 24D x 24H	8 cu. ft.
FD-410	37.5W x 44D x 71.5H	24W x 27D x 28H	10.5 cu. ft.

Power requirements vary by model




Follow us @AES_Chambers

FD-SERIES

13 ft³ & More



SPECIFICATIONS

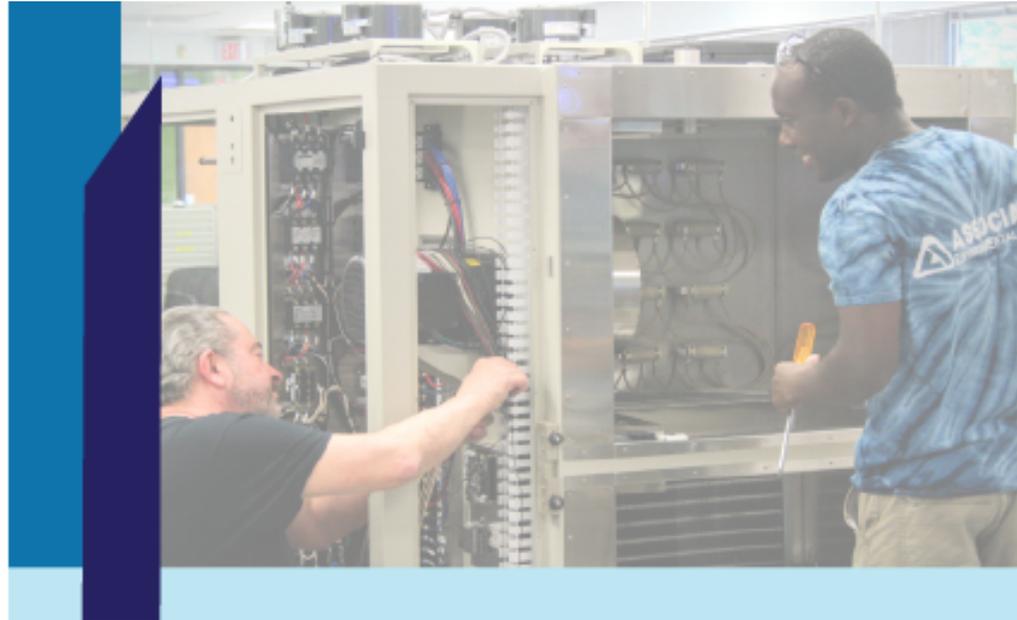

OPTIONS

- Custom Port Sizes
- Adjustable Shelving
- LN₂/CO₂ Boost Cooling
- Air Dryer for Lower Humidity Range
- Adjustable High/Low Temperature Safety
- Noise Reduction Package
- Retro Legacy F4 Controller
- Programmable Chart Recorder



For the latest in remote operation and data management, AES|XCHANGE enables you to operate and program the controller at the chamber, your desktop, and remotely via laptop or tablet. A visual graph allows you to view live & historical test data. A drag-&-drop profile builder allows you to create, edit, save, and move between profiles. Onboard multi-year data logging collect and manage live & historical data while chamber is operating. JSON API makes for easy communication. And access control allows for secure multi-user interaction.

For details and product specifications go to <https://www.associatedenvironmentalsyst.com/xchange>

FD-200's Temperature -65°C to 180°C (-85°F to 356°F)

Model	Overall Dimensions (in)	Inside Dimensions (in)	Working Volume
FD-213	37.5W x 44D x 71.5H	28W x 28D x 28H	12.703 cu. ft.
FD-221	41.5W x 49.5D x 76.5H	32W x 32D x 32H	18.962 cu. ft.
FD-227	54W x 72D x 75.5H	36W x 36D x 36H	27 cu. ft.
FD-232	56W x 74D x 77H	38W x 38D x 38H	31.754 cu. ft.
FD-249	60.5W x 79D x 88H	42W x 43.9D x 42H	44.814 cu. ft.
FD-264	67.5W x 82D x 94H	48W x 48D x 48H	64 cu. ft.

FD-500's Temperature -37°C to 180°C (-34.6°F to 356°F)

Model	Overall Dimensions (in)	Inside Dimensions (in)	Working Volume
FD-413	37.5W x 44D x 71.5H	28W x 28D x 28H	12.703 cu. ft.
FD-421	41.5W x 49.5D x 76.5H	32W x 32D x 32H	18.962 cu. ft.
FD-427	54W x 72D x 75.5H	36W x 36D x 36H	27 cu. ft.
FD-432	56W x 74D x 77H	38W x 38D x 38H	31.754 cu. ft.
FD-449	60.5W x 79D x 88H	42W x 43.9D x 42H	44.814 cu. ft.
FD-464	67.5W x 82D x 94H	48W x 48D x 48H	64 cu. ft.

FD-400's Temperature -17°C to 180°C (1.4°F to 356°F)

Model	Overall Dimensions (in)	Inside Dimensions (in)	Working Volume
FD-513	37.5W x 44D x 71.5H	28W x 28D x 28H	12.703 cu. ft.
FD-521	41.5W x 49.5D x 76.5H	32W x 32D x 32H	18.962 cu. ft.
FD-527	54W x 72D x 75.5H	36W x 36D x 36H	27 cu. ft.
FD-532	56W x 74D x 77H	38W x 38D x 38H	31.754 cu. ft.
FD-549	60.5W x 79D x 88H	42W x 43.9D x 42H	44.814 cu. ft.
FD-564	67.5W x 82D x 94H	48W x 48D x 48H	64 cu. ft.

Power requirements vary by model